

A MULTI-SURFACE PLASTICITY SAND MODEL INCLUDING THE LODE ANGLE EFFECT

Zhaohui Yang¹ (Associate Member, ASCE) and Ahmed Elgamal¹ (Member, ASCE)

ABSTRACT

A multi-surface plasticity model for cohesionless granular materials is developed, in which the Lade-Duncan failure criterion is employed as the yield function. This yield function includes the first and third stress invariants to account for the dependence of cyclic shear stress-strain behavior on confining pressure and the Lode angle. A purely deviatoric kinematic hardening rule is employed to generate hysteretic response under arbitrary cyclic loading conditions. Associativity of plastic flow is followed in the deviatoric plane. A non-associative flow rule is formulated for the hydrostatic component. Salient features of the model performance are presented under general three-dimensional (3D) loading conditions.

Keywords: Lode angle, cyclic plasticity, multi-surface plasticity, soil liquefaction, earthquake, soil dynamics

INTRODUCTION

The shear strength of granular soils strongly depends on confining pressure and the Lode angle effect (e.g., Lade and Duncan 1973, Chen 1982, Yamada and Ishihara 1983, Peric and Ayari 2002, Gutta et al. 2003). In soil plasticity models, this dependence may be represented by a yield (or failure) function that includes appropriate stress invariants (e.g., Argyris et al. 1974, Willam and Warnke 1974, Matsuoka 1974, Lade and Duncan 1975, Lade 1977, Ottosen 1977). For instance, the Lade-Duncan failure criterion (1975) was employed to model a large body of laboratory sample test data on cohesionless soils (Fig. 1). This criterion is defined by:

$$I_1^3 / I_3 = \kappa_1 \quad (1)$$

where I_1 and I_3 are the first and third stress invariants respectively, and κ_1 (>27) is a parameter related to soil shear strength (or friction angle ϕ).

¹ Department of Structural Engineering, University of California at San Diego, La Jolla, CA 92122, USA

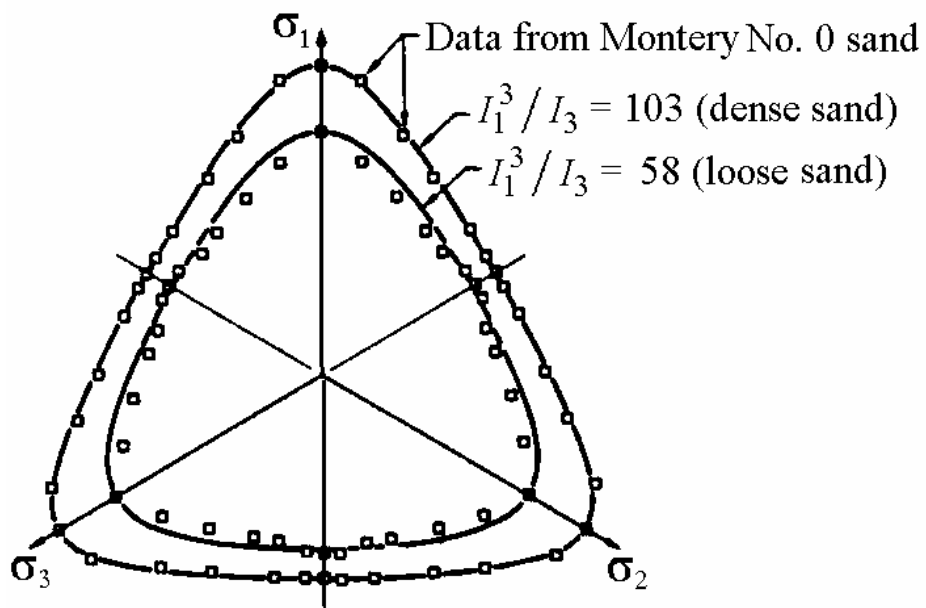
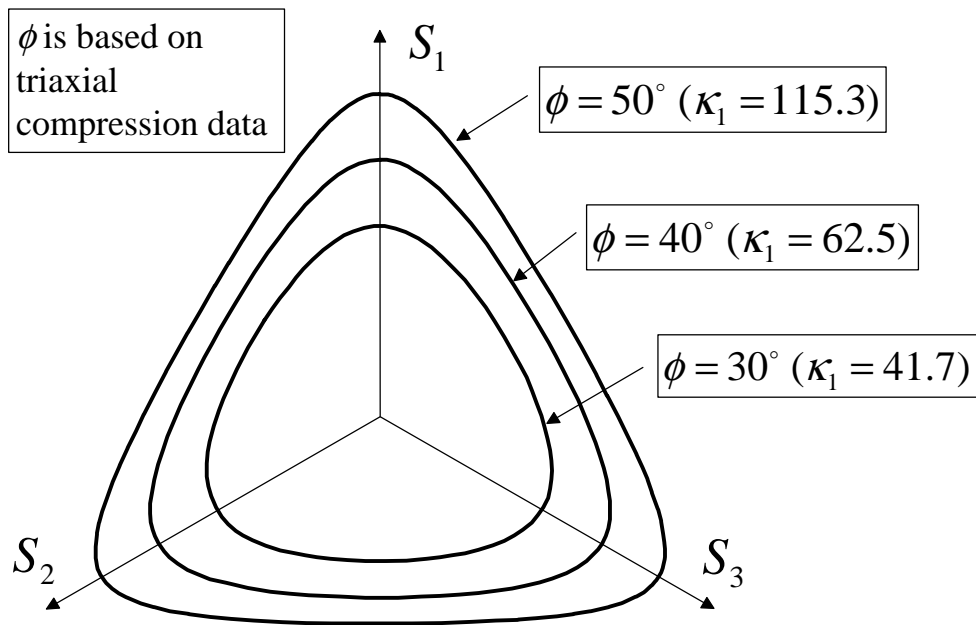


Fig. 1. Lade-Duncan failure criterion for various friction angles and experimental verification (Lade and Duncan 1975).

Failure criteria involving the Lode angle have been implemented in a large number of soil constitutive models, including bounding surface models (e.g., Dafalias 1986, Anandarajah and Dafalias 1986, Kaliakin et al. 1990, Wang et al. 1990, Anandarajah 1994, Manzari and Dafalias 1997, Li 1997, Manzari and Nour 2000, Li and Dafalias 2000, Ling et al. 2002), rotational hardening models (e.g., Inel and Lade 1997, Gutta et al. 2003), generalized plasticity models (e.g., Ling and Liu 2003), as well as isotropic hardening models (e.g., Lade and Duncan 1975, Lade and Kim 1988, Peric and Ayari 2002).

In this paper, a multi-surface plasticity model is described, in which the Lade-Duncan failure criterion (Eq. 1) is chosen as the yield function. The model formulation is first presented, including the employed yield function, hardening rule, and flow rule. Thereafter, a number of numerical simulations (drained and undrained) are shown to demonstrate the Lode angle effects under general 3D loading conditions.

MODEL FORMULATION

The model is based on the J_2 -plasticity framework developed by Prevost (1985) for granular materials, in which a multi-surface approach was adopted (Iwan 1967, Mroz 1967). The constitutive equation is written in incremental form as (Prevost 1985):

$$\dot{\boldsymbol{\sigma}} = \mathbf{E} : (\dot{\boldsymbol{\varepsilon}} - \dot{\boldsymbol{\varepsilon}}^p) \quad (2)$$

where $\dot{\boldsymbol{\sigma}}$ is the rate of effective stress tensor, $\dot{\boldsymbol{\varepsilon}}$ is the rate of deformation tensor, $\dot{\boldsymbol{\varepsilon}}^p$ is the plastic rate of deformation tensor, and \mathbf{E} is the isotropic fourth-order tensor of elastic coefficients. In this equation a superposed dot denotes material time derivative. The plastic rate of deformation tensor is defined by: $\dot{\boldsymbol{\varepsilon}}^p = \mathbf{P} \langle L \rangle$, where \mathbf{P} is a symmetric second-order tensor defining the outer normal to the plastic potential surface, L is the plastic loading function; and the symbol $\langle \rangle$ denotes the McCauley's brackets (i.e., $L=0$ if $L<0$). In the above, L is defined as: $L = (\mathbf{Q} : \dot{\boldsymbol{\sigma}}) / H'$ where H' is the plastic modulus, and \mathbf{Q} a unit symmetric second-order tensor defining the outer normal to the yield surface.

The yield function (Eq. 1) forms a smooth conical surface in principal stress space (Fig. 2), with apex at the origin. In the context of multi-surface plasticity, a number of similar yield surfaces with a common apex and different sizes form the hardening zone (Fig. 2). Each surface is associated with a constant plastic modulus.

A purely deviatoric kinematic hardening rule is employed (Mroz 1967, Prevost 1985). Thus, all surfaces but the outermost may translate in stress space. The direction of translation may be selected independently of any formal plasticity constraints, and is generally governed by the consideration that no overlapping is allowed between yield surfaces (Mroz 1967). In this model, the direction of surface translation is modified from the original Mroz's rule for enhanced computational efficiency (Elgamal et al. 2003). With the direction of translation defined, the amount of translation may then be obtained by satisfying the consistency condition $\dot{f} = 0$.

The flow rule follows closely that developed earlier for a multi-surface model with the Drucker-Prager yield function (Yang et al. 2003). This rule was developed to reproduce salient response mechanisms associated with liquefaction and the resulting shear deformations. We decompose the outer normals to the yield surface and the plastic potential surface (\mathbf{Q} and \mathbf{P}) into deviatoric and volumetric components giving $\mathbf{Q} = \mathbf{Q}' + \mathbf{Q}'' \delta$ and $\mathbf{P} = \mathbf{P}' + \mathbf{P}'' \delta$. The

associated flow is prescribed in the deviatoric plane, and nonassociativity of plastic flow is restricted to the volumetric component (Prevost 1985), i.e., $\mathbf{Q}' = \mathbf{P}'$ and $\mathbf{P}'' \neq \mathbf{Q}''$.

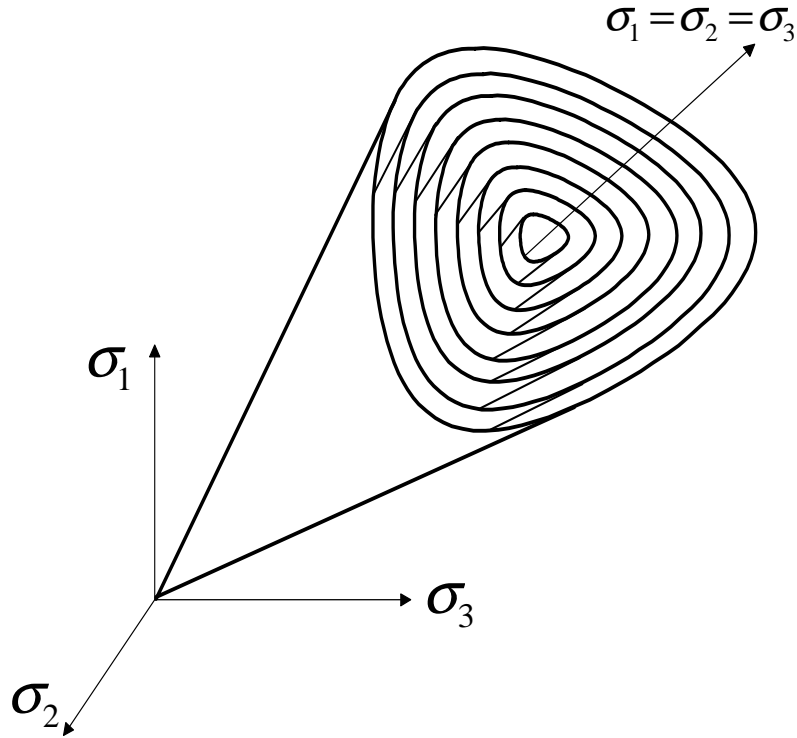


Fig. 2. Configuration of multi Lade-Duncan yield surfaces in principal stress space.

MODEL PERFORMANCE

A major advantage of including J_3 over J_2 -only models is added accuracy in modeling soil deformation under general three-dimensional (3D) loading scenarios. Herein, a number of 3D model simulation results illustrate some salient response characteristics.

Using discrete element numerical simulation, Thornton (2000) obtained the response of a system of elastic spheres subjected to a constant-deviatoric strain path (a circle in deviatoric strain space), with constant mean effective confinement. The resulting deviatoric stress path, along with that simulated by our constitutive model, is shown in Fig. 3. This non-circular stress path is attributed to the Lode angle effect, since a J_2 function would result in a perfectly circular stress path.

In Fig. 4, the result of a laboratory experiment is shown (Lewin 1980), where soil was subjected to a constant-deviatoric stress path (a circle in deviatoric stress space), under drained conditions. In this test, the applied mean effective confining pressure remained unchanged

throughout. The resulting deviatoric strain path is shown in Fig. 4a, along with the strain path simulated by our model (Fig. 4b). Both paths are of the same form as the stress paths in the last case (Figs. 3a and 3b), and manifest the Lode angle effect. A result similar to that of Fig. 4b was also reported by Dafalias and Herrmann (1986).

ACKNOWLEDGMENTS

This work was supported by the Pacific Earthquake Engineering Research (PEER) Center, under the National Science Foundation (Award No. EEC-9701568), and by NSF Grants (No. CMS0084616 and No. CMS0200510). Professor Paul V. Lade (Catholic University of America, Washington D.C.) encouraged us to conduct this research. Professor Jerry A. Yamamuro (University of Delaware) and Professor Xiang-Song Li (Hong Kong University of Science and Technology) kindly provided valuable suggestions and insights. The authors are most grateful for this assistance.

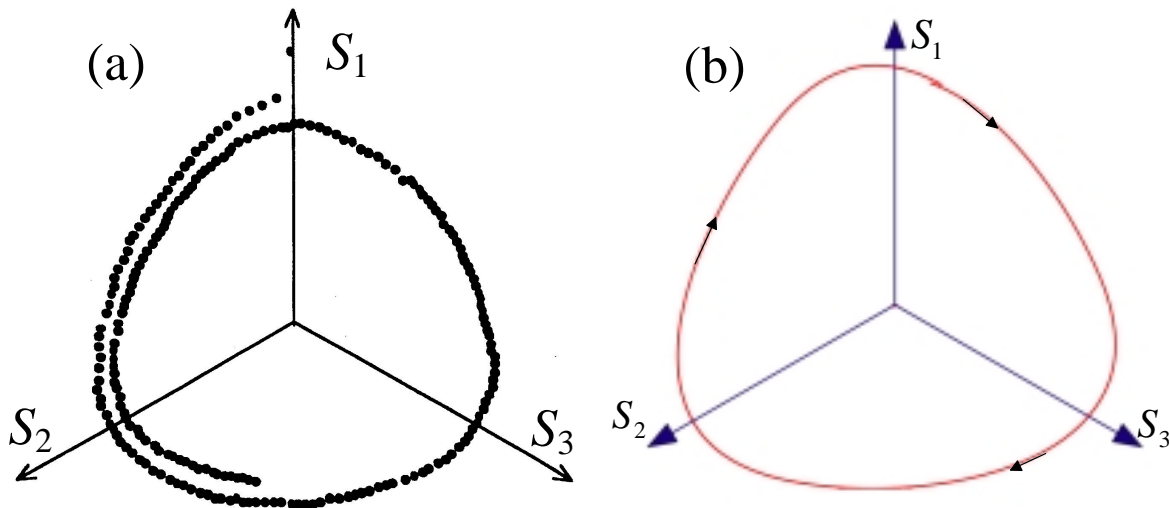


Fig. 3. Imposed constant deviatoric-strain path under drained, constant mean confinement conditions: (a) resulting deviatoric stress path using discrete-element simulation (Thornton, 2000), and (b) result from the developed model.

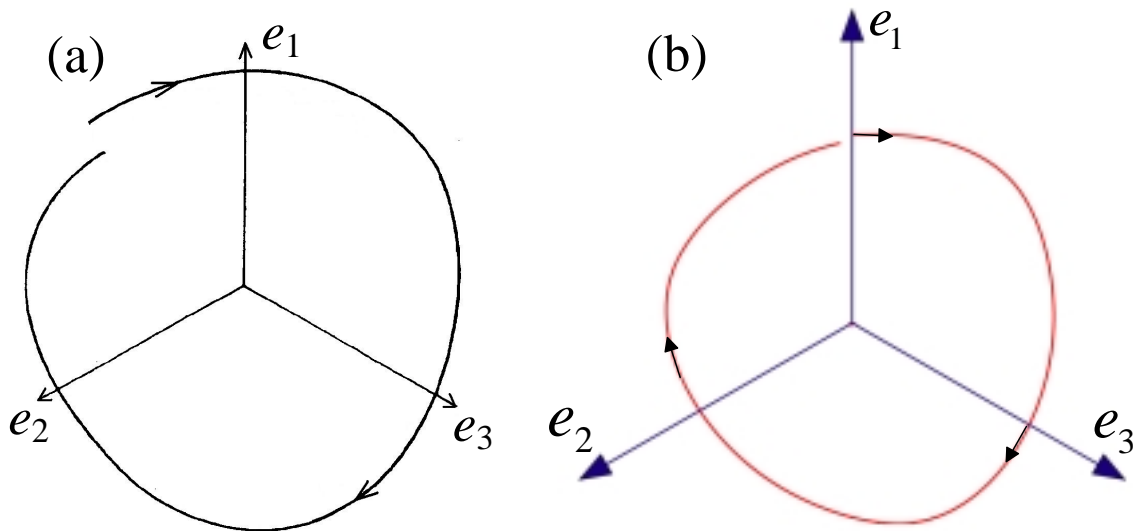


Fig. 4. Imposed constant deviatoric-stress path under drained, constant mean confinement conditions: (a) resulting deviatoric strain path from laboratory sample test (after Lewin 1980), and (b) result from the developed model (e_1 , e_2 , and e_3 are principal deviatoric strains).

REFERENCES

- Anandarajah, A. and Dafalias, Y.F. (1986). "Bounding Surface Plasticity III: Application to Anisotropic Cohesive Soils," *J. Engineering Mechanics*, ASCE, 112(12), 1292-1318.
- Anandarajah, A. (1994). "Procedures for Elastoplastic Liquefaction Modeling of Sands," *J. Engineering Mechanics*, ASCE, 120(7), 1563-1587.
- Argyris, J.H., Faust, G., Szimmat, J., Warnke, E.P. and Willam, K.J. (1974). "Recent Developments in the Finite Element Analysis of Prestressed Concrete Reactor Vessels," *Nuclear Engineering and Design*, 28, 42-75.
- Chen, W.F. (1982). *Plasticity in Reinforced Concrete*, McGraw-Hill Inc., New York.
- Chen, W.F. and Mizuno, E. (1990). *Nonlinear Analysis in Soil Mechanics: Theory and Implementation*, Elsevier Science Publisher, Netherlands.
- Dafalias, Y.F. and Herrmann, L.R. (1986). "Bounding Surface Plasticity II: Application to Isotropic Cohesive Soils," *J. Engineering Mechanics*, 112(12), 1263-1291.
- Elgamal, A., Yang, Z. and Parra, E. (2002a). "Computational Modeling of Cyclic Mobility and Post-Liquefaction Site Response," *Soil Dynamics and Earthquake Engineering*, 22(4), 259-271.
- Elgamal, A., Parra, E., Yang, Z. and Adalier, K. (2002b). "Numerical Analysis of Embankment Foundation Liquefaction Countermeasures," *J. Earthquake Engineering*, 6(4), 447-471.
- Elgamal, A., Yang, Z., Parra, E. and Ragheb, A. (2003). "Modeling of Cyclic Mobility in Saturated Cohesionless Soils," *Int. J. Plasticity*, 19(6), 883-905.

- Gutta, S. K., Yamamuro, J.A. and Lade, P.V. (2003). "Predictions of Large Three-Dimensional Stress Reversals in Sand," *Proc., 16th ASCE Engineering Mechanics Conference*, July 16-18, Univ. of Washington, Seattle, WA.
- Inel, S. and Lade, P.V. (1997). "Rotational kinematic hardening model for sand. Part II: Characteristic work hardening law and predictions," *Computers and Geotechnics*, 21(3), 217-234.
- Iwan, W. D. (1967). "On a class of models for the yielding behavior of continuous and composite systems," *J. Applied Mechanics*, 34, 612-617.
- Kaliakin, V.N., Muraleetharan, K.K., Dafalias, Y.F., Herrmann, L.R. and Shinde, S.B. (1990). "Foundation-Response Predictions below Caisson-Retained Island," *Journal of Geotechnical Engineering*, ASCE, 116(9), 1291-1308.
- Lade, P.V. and Duncan, J.M. (1973). "Cubical Triaxial Tests on Cohesionless Soil," *J. Soil Mech. Found. Division*, ASCE, 99(SM10), 793-812.
- Lade, P.V. and Duncan, J.M. (1975). "Elastoplastic Stress-Strain Theory for Cohesionless Soil," *J. Geotechnical Engineering Division*, ASCE, 101(GT10), 1037-1053.
- Lade, P.V. (1977). "Elasto-Plastic Stress-Strain Theory for Cohesionless Soil with Curved Yield Surfaces," *Intl. J. Solids Structures*, 13, 1014-1035.
- Lade, P.V., and Kim, M.K. (1988). "Single hardening constitutive model for frictional materials. II. Yield criterion and plastic work contours," *Computers and Geotechnics*, 6, 13-29.
- Lewin, P.I. (1980). "Cyclic 3-D Stress Paths and Superposition of Hysteresis Loops," *Proceedings, Int. Symposium on Soils under Cyclic and Transient Loading*, January 7-11, Swansea, U.K., 225-229.
- Li, X.S. (1997). "Rotational shear effects on ground earthquake response," *Soil Dynamics and Earthquake Engineering*, 16(1), 9-19.
- Li, X.S. and Dafalias, Y.F. (2000). "Dilatancy for Cohesionless Soils," *Geotechnique*, 50(4), 449-460.
- Li, X.S. and Su, D. (2004). "Centrifuge Investigation of Impact of Biaxial Shaking on Liquefaction Potential of Level Sand Deposit," *Proc., 11th Int. Conf. on Soil Dynamics & Earthquake Engineering and 3rd Int. Conf. on Earthquake Geotechnical Engineering*, 7th - 9th January, University of California, Berkeley.
- Ling, H.I., Yue, D., Kaliakin, V.N., and Themelis, N.J. (2002). "Anisotropic Elastoplastic Bounding Surface Model for Cohesive Soils," *J. Engineering Mechanics*, ASCE, 128(7), 748-758.
- Ling, H.I and Liu, H. (2003). "Pressure Level Dependency and Densification Behavior of Sand Through a Generalized Plasticity Model," *J. Engineering Mechanics*, ASCE, 129(8), 851-860.
- Manzari, M.T. and Dafalias, Y.F. (1997). "A Critical State Two-Surface Plasticity Model for Sands," *Geotechnique*, 49(2), 252-272.
- Manzari, M.T. and Nour, M.A. (2000). "Significance of Soil Dilatancy in Slope Stability Analysis," *J. Geotechnical and Geoenvironmental Engineering*, ASCE, 126(1), 75-80.
- Matsuoka, H. (1974). "Stress-Strain Relationships of Sand Based on the Mobilized Plane," *Soils and Foundations*, 14(2), 47-61.
- Mroz, Z. (1967). "On the Description of Anisotropic Work Hardening," *J. Mechanics and*

- Physics of Solids*, 15, 163-175.
- Ottosen, N.S. (1977). "A failure Criterion for Concrete," *J. Engineering Mechanics Division*, ASCE, 103 (EM4), 527-535.
- Peric, D. and Ayari, A. (2002). "On the analytical solutions for the three-invariant Cam clay model", *Int. J. Plasticity*, 18, 1061-1082.
- Prevost, J.H. (1985). "A Simple Plasticity Theory for Frictional Cohesionless Soils," *Soil Dynamics and Earthquake Engineering*, 1, 9-17.
- Thornton, C. (2000). "Numerical Simulations of Deviatoric Shear Deformation of Granular Media," *Geotechnique*, 50(1), 43-53.
- Wang, Z., Dafalias, Y. F., and Shen, C. K. (1990). "Bounding surface hypoplasticity model for sand." *J. Eng. Mech.*, ASCE, 116(EM5), 983-1001.
- Willam, K.J. and Warnke, E.P. (1974). "Constitutive model for triaxial behavior of concrete", *Colloquium on Concrete Structures Subjected to Triaxial Stresses, ISMES Bergamo, IABSE Report*, 19.
- Yang, Z. and Elgamal, A. (2002). "Influence of Permeability on Liquefaction-Induced Shear Deformation," *J. Engineering Mechanics*, ASCE, 128(7), 720-729.
- Yang, Z., Elgamal, A. and Parra, E. (2003). "A Computational Model for Cyclic Mobility and Associated Shear Deformation," *J. Geotechnical and Geoenvironmental Engineering*, 129(12), 1119-1127.